

# Biometric Full Height Turnstile

FHT2400: Full Height Turnstile

FHT2411: Full Height Turnstile with RFID Access Control System


FHT2422: Full Height Turnstile with Fingerprint and RFID Access Control System

Semi-automatic  
mechanism

Visible indicator

SUS304 stainless  
steel cabinet

Modular design

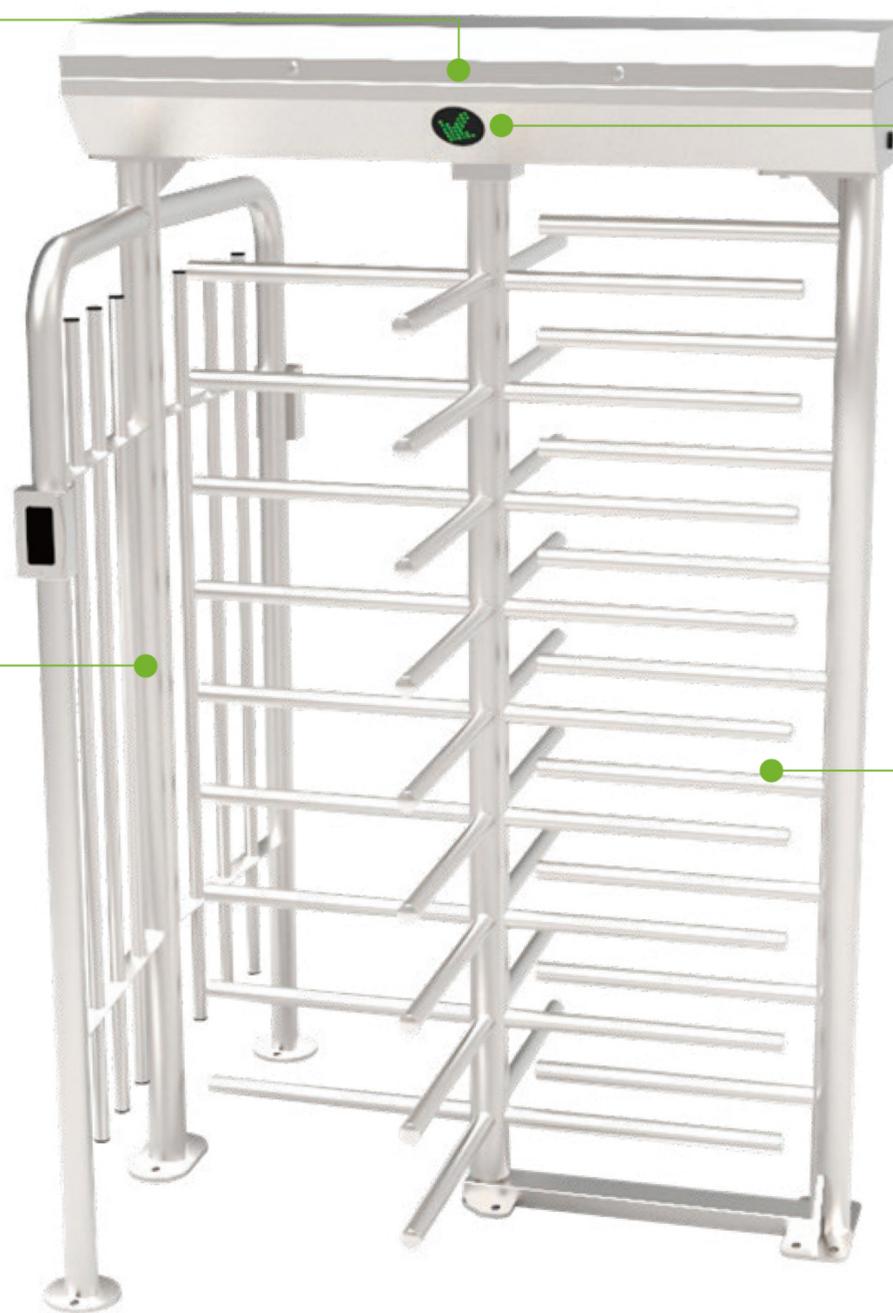

## Application



Industrial facility



Corporate security



Government security




Public transportation

# Specifications

|                             |                           |                   |
|-----------------------------|---------------------------|-------------------|
| Power Requirements          | AC110V/220V, 50/60Hz      |                   |
| Working Temperature         | -28°C to 60°C             |                   |
| Working Humidity            | 25% to 75%                |                   |
| Working Environment         | Indoor/Outdoor            |                   |
| Speed of Throughput         | RFID                      | Maximum 20/minute |
|                             | Fingerprint               | Maximum 15/minute |
| Lane Width                  | 580 mm                    |                   |
| Footprint (L*W)             | 1400*1320 (mm)            |                   |
| Dimension (L*W*H)           | 1400*1320*2220 (mm)       |                   |
| Dimension with Packing (mm) | 1520*1220*2230 (mm)       |                   |
| Net Weight (kg)             | 230kg                     |                   |
| LED Indicator               | Supports                  |                   |
| Cabinet Material            | SUS304 Stainless Steel    |                   |
| Barrier Material            | SUS304 (optional: SUS316) |                   |
| Barrier Movement            | Rotating                  |                   |
| Emergency Mode              | Supports                  |                   |
| Security Level              | High                      |                   |
| MCBF                        | 1 million                 |                   |
| Ingress Protection          | IP54                      |                   |
| Warranty                    | 1 year                    |                   |

## Dimensions (mm)

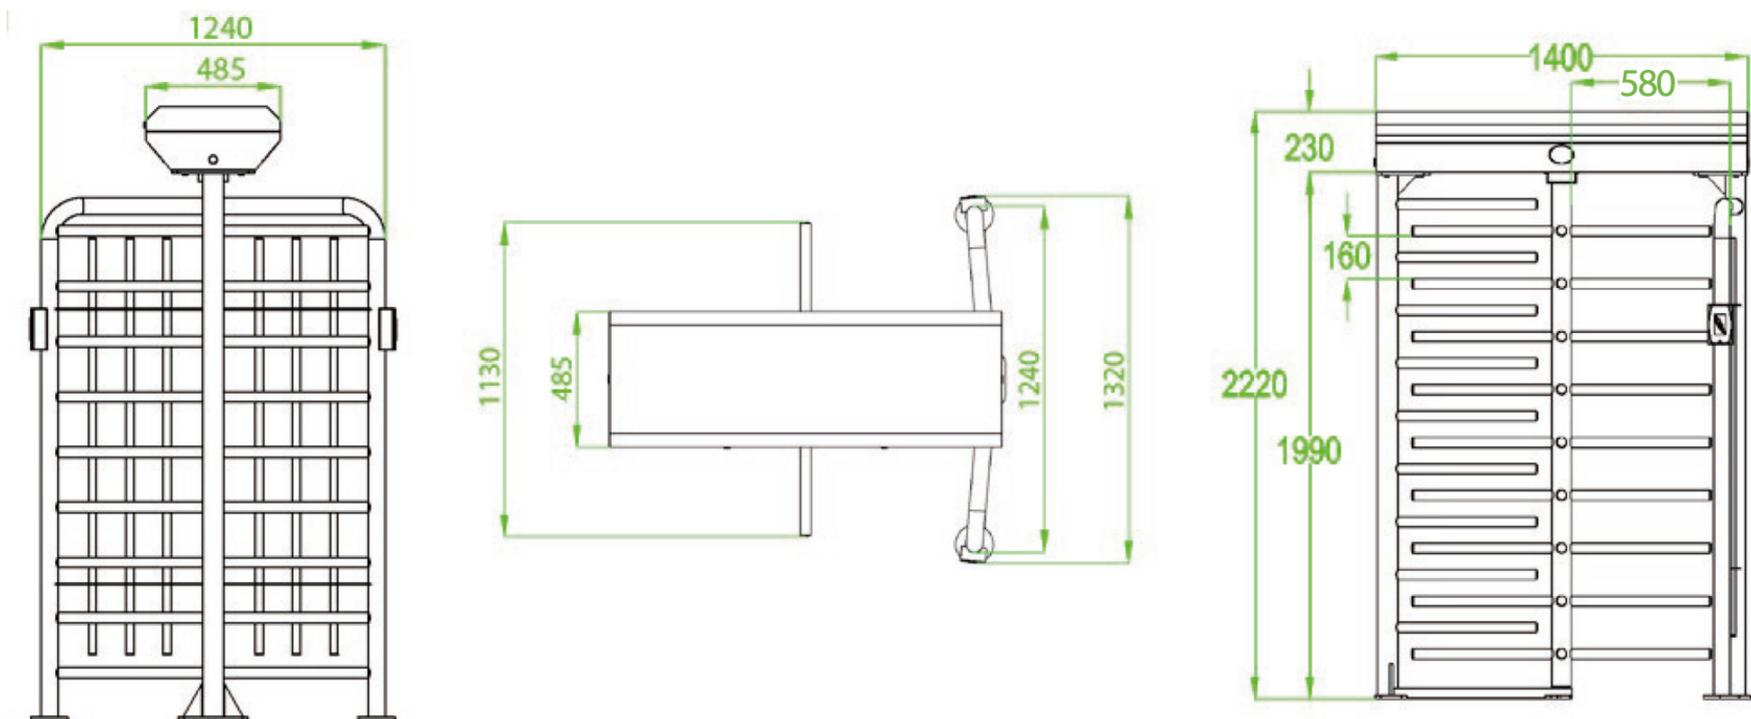

To prevent the corrosion of stainless steel, we recommend not to use in highly corrosive environments, such as sea-side, chemical plants and saline-alkali soils.

